

UPster B Flight Type Dishwasher

UPster B 460VAP CSS-Top: Pre-wash + wash + wash +
Unloading section / drying section

Capacity: 4000 / 5700 / 6600 plates/h

Heating: Electric

Working direction: Left to right

Power supply: 3N PE 380V 50Hz

Tank filling: Soft warm water




UPster B is the new generation of warewashing technology.

Perfectly tailored for people and the environment, economical, resource-efficient and user-friendly.

- MEIKO UPster B offers state-of-the-art technology at an impressively low price and offers an outstanding array of advanced technologies.
- Designed to make hygiene management more efficient than ever, it guarantees maximum cleanliness all the way down the line.
- The built-in chemical saving system CSS optimizes wash performance, reducing chemical use by up to 50 percent.
- The CSS-Top version goes even further, achieving reductions in chemical use of up to 80 percent.
- The intelligent AWS system significantly reduces the amount of water used by the warewasher, keeping the use of this valuable resource to a minimum while still maintaining sparkling clean results.

MEIKO UPster B. All the latest warewashing improvements in a single system.

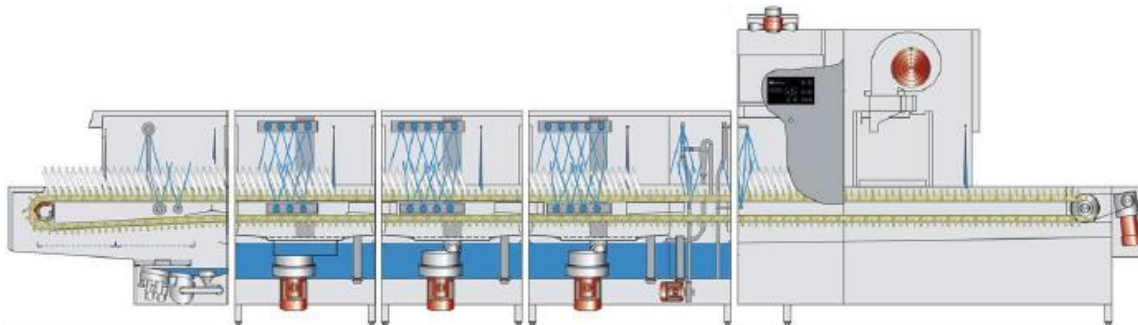

Schematic sectional view of machine

Technical data


Performance




- | | |
|-----------------------------|--------------------------|
| ▪ Contact length | 3600 mm |
| ▪ Contact time | 2 minutes |
| ▪ Transport speed 1 / 2 / 3 | 1.80 / 2.55 / 2.95 m/min |

Dish Capacity



4000 / 5700 / 6600 plates/h


Machine conveyor belt for dishes	MTB 1.11 Multi-purpose conveyor
Motors	
• Total	7.7 kW
Heating energies	
• Total	45.7 kW
Electrical feeding cable	
• Power supply	3N PE 380V 50Hz
• Total connected load	53.4 kW
• max. rated current	88.8 A
• Max. Elect. cable cross-section	35 mm ²
Fresh water	
• Fresh water final rinse: soft cold water	300 l/h
Tank filling	
• Soft warm water	430 l
Air outlet	
• Exhaust air volume approx.	800 m ³ /h
• Exhaust air temperature approx.	35 °C
• Relative humidity approx.	85 %
Heat load	
• total	5.6 kW
• Perceptible	2.1 kW
• latent	3.5 kW
Dimensions of machine	
• Feeding section	1400 mm
• Pre-wash tank	900 mm
• Wash tank	900 mm
• Wash tank	1300 mm
• Unloading section / drying section	2600 mm
Total	7100 mm
Machine separation	Separation at the unloading section Separation between 1st and 2 nd Wash zone
Equipment	Exhaust air heat recovery Heaters Incoloy 825 Drying (TR1500)

Type code: B460VAP-nT-L-E1400-380/50-E-A2600-D1500-nC-IC	
1.1	Machine drain DN 70, dia. 75 a, Onsite pipe system connection and siphon
2.1	Water connection of the machine: Soft warm water 50°C, DN 20, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) consumption approx. 430 l for tank filling
2.2	Water connection of the machine: Soft cold water, DN 20, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) consumption approx. 300 l/h for final rinse
3.1	Electrical connection of the machine: 3N PE 380V 50Hz nominal current / - capacity: 88.8 A / 53.4 kW Max. Elect. cable cross-section: 35 mm ² free cable end from finished floor level/Wall: approx. 4 m ⊕ Voltage equalising cable
6.0	Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % The total heat load includes 6.1 and 6.2
6.1	Machine exhaust air pipe, dia. 360 mm Heat load of the machine in normal washing operation: Latent: 3.5 kW, perceptible: 2.1 kW, total: 5.6 kW At a freshwater supply temperature of approx. 12°C
6.2	The heat load of the wash ware must be considered separately. For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282.
 Separation Machine Equipment Exhaust air heat recovery heaters Incoloy 825	

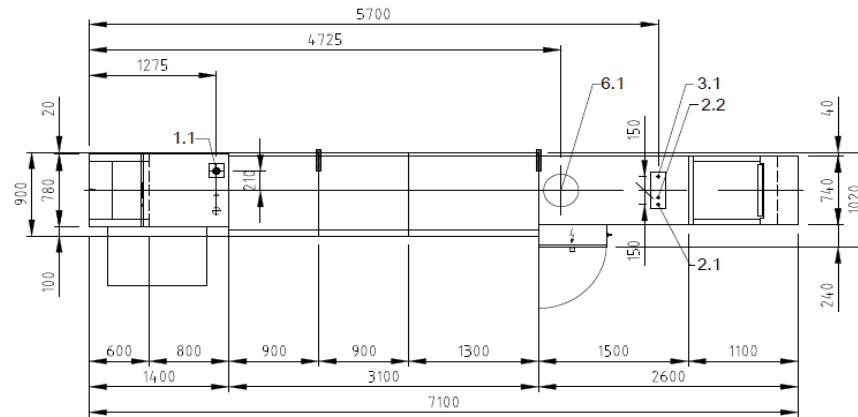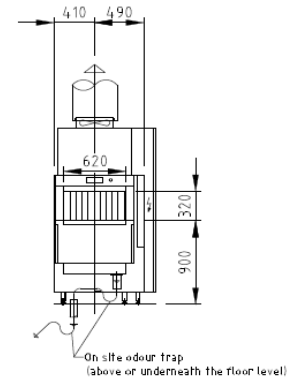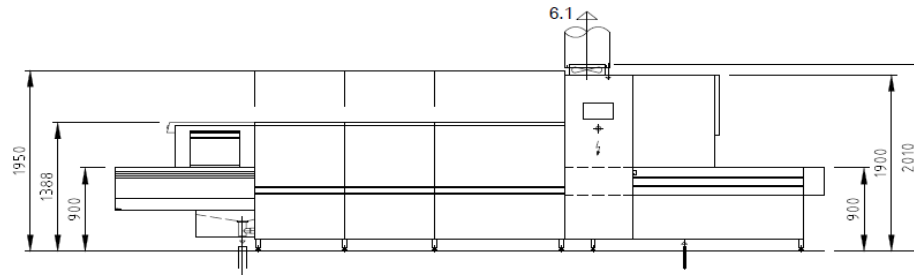

**RECOMMENDATION AIR OUTLET
EXTENSION ON SITE**
(exhaust air outlet or exhaust heat recovery)

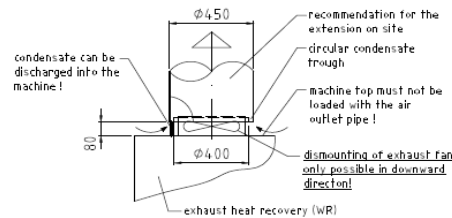

 MEKO MIDDLE EAST FZE Gold Diamond Park, Building #6, office #206 P.O. Box 282365, U.A.E. - Dubai Phone +971 43 41 51 72 E-MAIL: wa@meiko.de	Revision		Type
	Reference	UPSTER STANDARD DRAWING / ARE	UPSTER B460VAP CSS-TOP L-R ELECTRO
This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change management. Please note: This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnerweb.	Drawing-no.	S00085583	Order-no.
	Scale	1:50	drawn
	checked	27.07.2020	m-iplan