

UPster B Flight Type Dishwasher

UPster B 690VAP :Pre-wash + wash + wash + wash with pump rinse + drier

Execution for Saudi Arabia

Capacity: 4500 / 6700 / 7700 plates/h

Heating: Electric

Working direction: Left to right

Power supply: 3N PE 380V 60Hz


Tank filling: Soft warm water

UPster B is the new generation of warewashing technology.

Perfectly tailored for people and the environment, economical, resource-efficient and user-friendly.

MEIKO UPster B offers state-of-the-art technology at an impressively low price. UPster B offers an outstanding array of advanced technologies. Designed to make hygiene management more efficient than ever, it guarantees maximum cleanliness all the way down the line. The built-in chemical saving system CSS optimizes wash performance, reducing chemical use by up to 50 percent. The CSS-Top version goes even further, achieving reductions in chemical use of up to 80 percent. The intelligent AWS system significantly reduces the amount of water used by the warewasher, keeping the use of this valuable resource to a minimum while still maintaining sparkling clean results.

MEIKO UPster B. All the latest warewashing improvements in a single system.

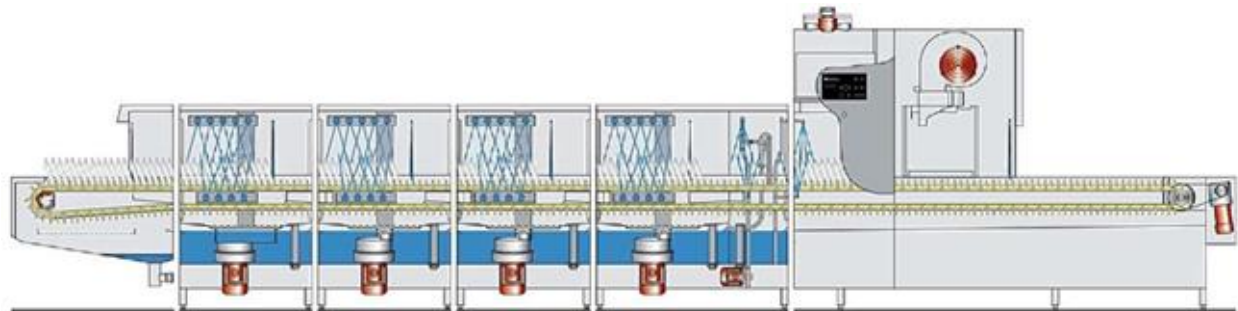

Schematic drawing Model B 690 VAP Total length: 8100 mm (with drying section)

Technical data

Performance

- Contact length 4000 mm
- Contact time 2 minutes
- Transport speed 1 / 2 / 3 2.00 / 3.00 / 3.45 m/min

Dish Capacity

4500 / 6700 / 7700 plates/h

Machine conveyor belt

- for dishes MTB 1.11 Multi-purpose conveyor

Motors

- Total 10.8 kW

Heating energies

- Total 58.1 kW

Electrical feeding cable

- Power supply 3N PE 380V 60Hz
- Total connected load 68.9 kW
- max. rated current 111.8 A
- Max. Elect. cable cross-section 95 mm²

Fresh water

- Fresh water final rinse: soft cold water 340 l/h

Tank filling

- Soft warm water 530 l

Air outlet

- Exhaust air volume approx. 800 m³/h
- Exhaust air temperature approx. 35 °C
- Relative humidity approx. 85 %

Heat load

- total 5.9 kW
- Perceptible 2.4 kW
- latent 3.5 kW

Dimensions of machine

- Feeding section 1100 mm
- Prewash section 900 mm
- Wash tank 900 mm
- Wash tank 900 mm
- Wash tank with pump rinse 1300 mm
- Unloading section / drying section 3000 mm
- Total 8100 mm**

Machine separation

Separation at the unloading section
 Separation between 1st and 2nd wash zone




Equipment

Exhaust air heat recovery
 Heaters Incoloy 825
 Drying (TR1500)

OPTION: Thermolabel test 71°C

Please note the kW load will increase to approx. 15kW if Thermolabel test is added

Type code: B690VAP-nT-L-E1100-380/60-E-A3000-D1500-nC-IC	
1.1	Machine drain DN 70, dia. 75 a, Onsite pipe system connection and siphon
2.1	Water connection of the machine: Soft warm water 50°C, DN 20, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) consumption approx. 530 l for tank filling
2.2	Water connection of the machine: Soft cold water, DN 20, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) consumption approx. 340 lh for final rinse
3.1	Electrical connection of the machine: 3N PE 380V 60Hz nominal current / - capacity: 111.8 A / 68.9 kW Max. Elect. cable cross-section: 95 mm ² free cable end from finished floor level/Wall: approx. 4 m ① Voltage equalising cable
6.0	Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % The total heat load includes 6.1 and 6.2
6.1	Machine exhaust air pipe, dia. 360 mm Heat load of the machine in normal washing operation: Latent: 3.5 kW, perceptible: 2.4 kW, total: 5.9 kW At a freshwater supply temperature of approx. 12°C
6.2	The heat load of the wash ware must be considered separately. For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282
<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; border: 1px solid black; margin-right: 5px;"></div> Separation </div> <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; border: 1px solid black; margin-right: 5px;"></div> Machine Equipment </div> <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; border: 1px solid black; margin-right: 5px;"></div> Exhaust air heat recovery heaters Incotloy 825 </div>	

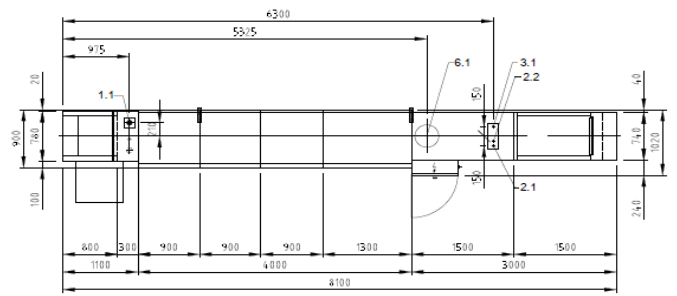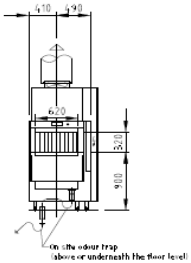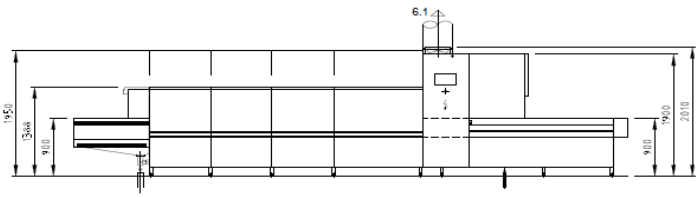

RECOMMENDATION AIR OUTLET EXTENSION ON SITE
(exhaust air outlet or exhaust heat recovery)

condensate can be discharged into the machine


recommendation for the extension on site

drainage condensation through

machine top must not be loaded with the air outlet pipe!

dimensions of exhaust trap will be like to dimension standard

exhaust heat recovery (HR)



	MICO MIDDLE EAST FZE Standard Part, Building 88, office #216 P.O. Box 29298, W.A.E., Dubai Phone: +971 43 45 5172 E-MAIL: info@mico.ae	Revision: 1 UPSTER STANDARD DRAWING / SAU	Title: UPSTER B690VAP L-R ELECTRO
	The drawing shall not be used for construction without the written consent of MICO. The user shall be responsible for the correct interpretation of the drawing and for the compliance with the applicable standards and regulations. The user shall be responsible for the correct interpretation of the drawing and for the compliance with the applicable standards and regulations. The user shall be responsible for the correct interpretation of the drawing and for the compliance with the applicable standards and regulations.	Drawing No.: S00085626	Author:
Date: 27.07.2020 Scale: 1:50 Project: m-plan	Date: 27.07.2020 Scale: 1:50 Project: m-plan	Date: 27.07.2020 Scale: 1:50 Project: m-plan	Date: 27.07.2020 Scale: 1:50 Project: m-plan