

UPster U 500 – Undercounter glass and dishwasher

MEIKO's UPster U range of undercounter dishwashers pulls out all the stops when it comes to professional warewashing technology, offering efficient cleaning performance, easy operation, maximum flexibility, and exceptional value for money. It's the perfect choice for your wash-up area. Simply pop it in place, connect it up, and you're ready to go!

Execution for: United Arab Emirates

Country of production: China

Glass and dishwasher with built-in water softening device

Fresh water line: Cold water

3-phase current: 3N PE 400V 50Hz

Technical data

Rack capacity/h (theoretical)	30 / 20 / 15 racks/h
Programme cycle	120 / 180 / 240 s (glass / dish / dish intensive)
Rack dimension	500 x 500 mm (530 x 500)
Entry height	320 mm
Dimensions (W x Hmin x D)	600 x 820 x 665 mm
Electrical feeding cable	3-phase current 3N PE 400V 50Hz* Total connected load: 5.2 kW max. rated current: 12.8 A
Local fuse protection	16 A
Machine protection class	IP X4
Equipment	MIKE control Infrared interface for wireless communication Soft start Boiler safety device Automatic self-cleaning when tank is drained Booster pump Built-in water softening device EW 10, 10000 hardness litres
Fresh water supply	Minimum flow pressure 60 kPa / 0.6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5.0 bar Max. supply water temperature 60 °C
Flow rate	4 l/min
Final rinse water quantity	3 liters/cycle
Boiler	Contents: 8 l Heater: 4.50 kW Temperature: 65 °C, with dish wash programme 83 °C Tank / boiler locked




Wash tank	Filling: 20 l Heater: 2.00 kW Temperature: 60 °C
Wash pump	Performance: 0.55 kW
Dosing of rinse aid	Potential free terminals (changeable to 230V) for local dosing system
Detergent dosage	Potential free terminals (changeable to 230V) for local dosing system
Material	Cladding: 1.4301 Wash tank: 1.4301 Boiler: 1.4404
Heat emission	for 15 programme cycles/h total: 1.6 kW perceptible: 1.0 kW latent: 0.6 kW
Ventilation flow rate	400 m ³ /h
Steam emission	0.7 kg/h
Emission sound pressure level at the workplace (LpA)	61 dB
Net / gross weight	63.0 kg / 75.0 kg (standard packaging)
Packaging dimensions (W x H x D)	700 x 1050 x 700 mm (standard packaging)

***Note:**

Electrical equipment suitable for supply voltage:
3N PE 400 V 50 HZ (3N PE 380-415 V 50 Hz)
1N PE 230 V 50 HZ (1N PE 220-240 V 50 Hz)


* Programme cycle time depending on temperature of feeding water:
Prolongation of wash cycle with cold water connection or single phase execution;
For machine with single phase connection, warm water connection is recommended.

1.0	machine connection: Drain line hose fitted as odour trap in interior of machine	DN 22
1.1	drain (recommended height 70 mm, over 120 mm waste water pump required)	DN 50
2.0	machine connection: fresh water line	G 3/4"
2.5	untreated cold water 10°C approx. water flow rate 4 l/min min. flow pressure: 60 kPa / 0,6 bar upstream of the solenoid valve, maximum pressure: 500 kPa / 5 bar stopcock and fine screen ≤ 25 µm	DN 15
		G 3/4 a
3.0	machine connection: electricity connecting cable	5G 2,5mm ²
3.1	electricity supply to the machine	3N PE 400V ~ 50Hz
	nominal current / - capacity	12,8 A 5,2 kW
	⚡ Voltage equalising cable	Fuse protection: 16 A
Electrical equipment suitable for supply voltage: 3N PE 380-415 V 50 Hz / 1N PE 220-240 V 50 Hz		
heat load of the wash room in case of 15 program cycles /h	total	ca.1,6 kW
	perceptible	ca.1,0 kW
	latent	ca.0,6 kW
all cables, pipes etc leaving machine		1,6 m
the position of the connection piping can also be mirror-inverted		
Machine Equipment		
(A) Entry height		
Potential free terminals (changeable to 230V) for local dosingsystem		
Booster pump		
EW10, built-in water softening device		

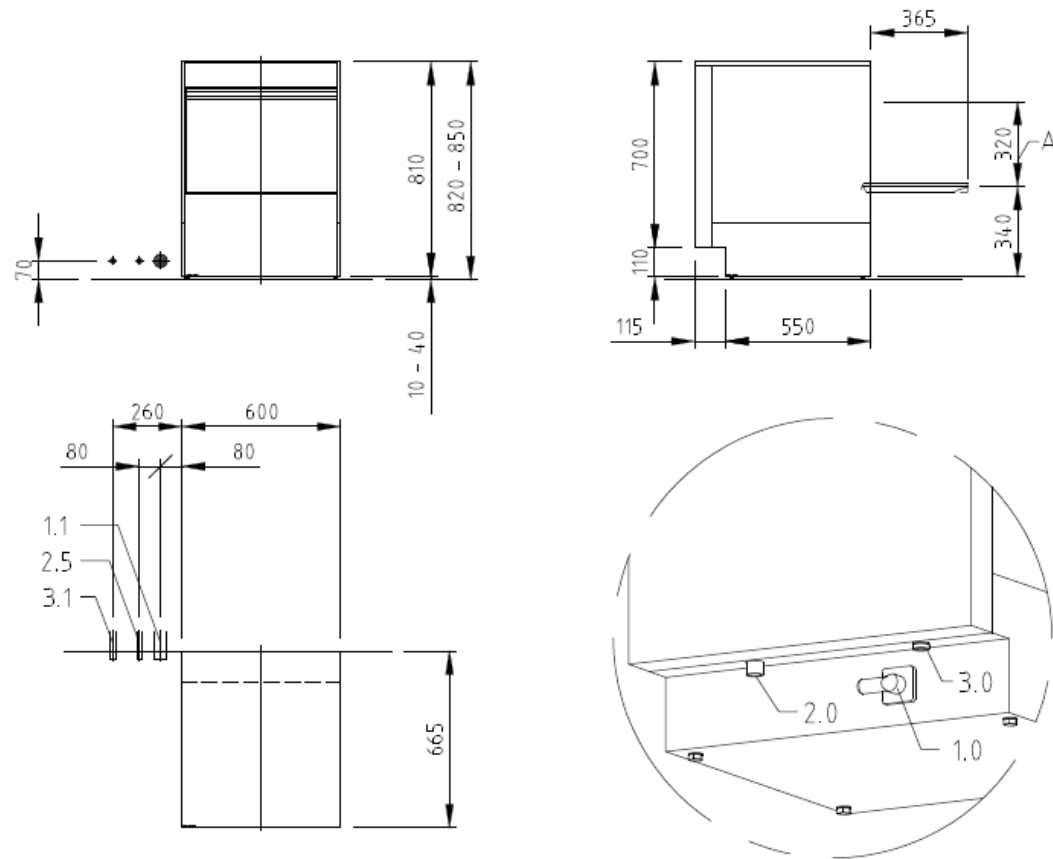

MP000410985.1.6

© COPYRIGHT by MEIKO

 MEIKO MEIKO MIDDLE EAST FZE GoldDiamond Park, Building#6, office #206 P.O. Box 282365, U.A.E.-Dubai Phone +971 43 41 51 72 E-MAIL: wat@meiko.de	Revision	
	Reference	DISHWASHER STANDARD DRAWING / ARE
This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change management. Please note: This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnetnet.	Type	UPSTER U 500S
	Drawing-No.	S00080962
Scale	1:25	Order-No.
drawn:	17.05.2020 m-iplan	checked:
		17.05.2020 m-iplan

ARE EN

© COPYRIGHT by MEIKO