
1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (max. 700 mm above finished floor level), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO₃ (max. 3°dH) Flow rate: 3 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 μm
3.0	Machine connection: electrical connection cable 3G 2,5 mm²
3.1	electricity supply to the machine: 1N PE 230V ~ 50Hz nominal current / - capacity: 15,7 A / 2,9 kW Fuse protection: 16 A Voltage equalising cable The master switch must be provided on site Note: Electrical equipment suitable for supply voltage:
	3N PE 380-415 V 50 Hz / 1N PE 220-240 V 50 Hz
6.0	Heat load of warewash area
6.1	for 20 programme cycles/h total 1,4 kW, perceptible 1,0 kW, latent 0,4 kW
all cables, pipes etc leaving machine 1,6 m	
the position of the connection piping can also be mirror-inverted!	
Machine Equipment	
(A) Entry height	
Final rinse dosing unit with suction lance (blue connector)	



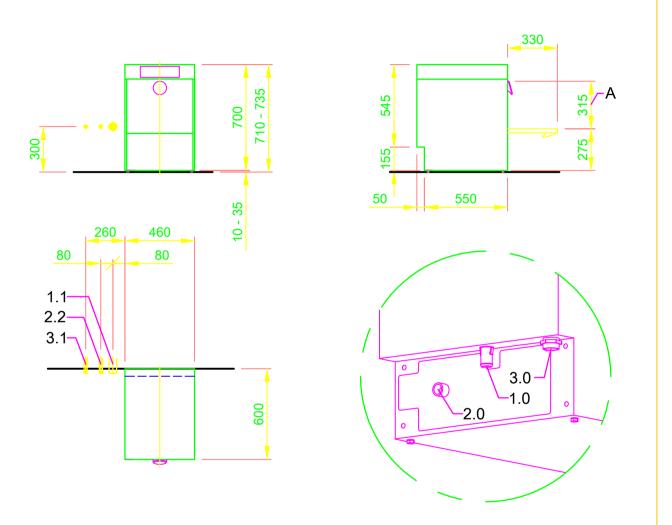

OM000025847.2.5

Detergent dosing unit and suction lance

©COPYRIGHT by MEIKO AFG EN