



Type code: KF-M EV6 N2-1 AT65P	Type code: KF-M EV6 N2-1 AT65P								
1.0 Tank drain DN 50, Ø 55 a, Connection pipe work and P-trap to be provided locally (DN 70)	÷								
2.0 Water connection of the machine: Soft cold water 12 - 24°C, DN 20, G 3/4 a max. 0,54 mmol/I CaCO₃ (max. 3°dH) consumption approx. 260 l/h for final rinse consumption approx. 90 l for tank filling									
 3.0 Electrical connection of the machine: 3N PE 400V ~ 50Hz Connected load for peak: 44.3 A nominal current / - capacity: 44.3 A / 28.0 kW Max. Elect. cable cross-section: 35 mm² free cable end from finished floor level/Wall: approx. 4 m 									
6.0 Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % Distribution of the total heat load (machine 6.1 and washware 6.2 onto the suction surfaces during the washing operation. (Recommended suction surfaces in accordance with EN 16282): 6.01: approx. 67% 6.02: approx.33%	The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % Distribution of the total heat load (machine 6.1 and washware 6.2) onto the suction surfaces during the washing operation. (Recommended suction surfaces in accordance with EN 16282):								
6.1 Heat load of the machine in normal washing operation: Latent: 1.9 kW, perceptible: 2.9 kW, total: 4.8 kW At a freshwater supply temperature of approx. 12°C									
6.2 The heat load of the wash ware must be considered separately.									
For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282.	d.								
Recommended area for local supply lines (water, drain, electricity)									
Separation									
Machine Equipment	nine Equipment								
Exhaust air heat recovery	ust air heat recovery								
Feeding table on site									
	narge table on site								

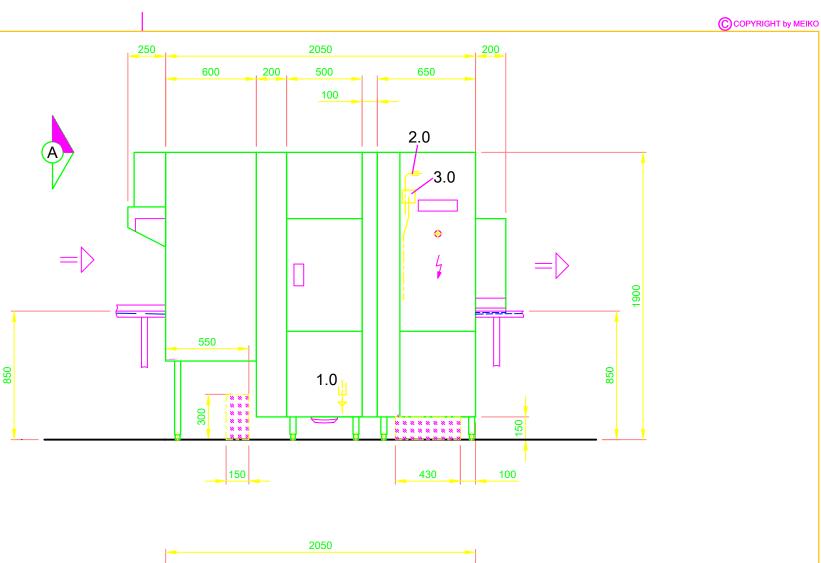

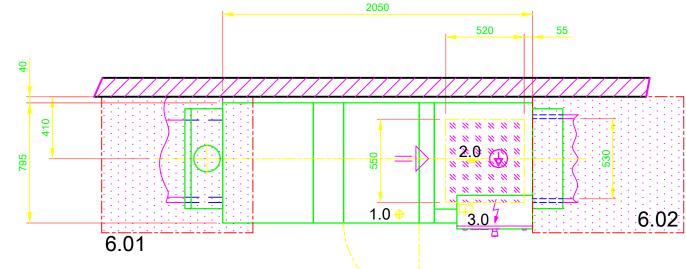

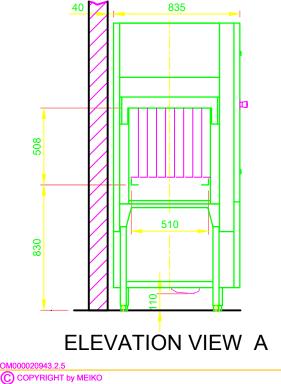



Electrical connection in the cabinet of the machine On-site drainage provide in front of the machine!

<u>لالا</u>

MEIKO MIDDLE EAST FZE GoldDiamond Park, Building#6, office #206 P.O. Box 282365, U.A.E.-Dubai Phone +971 43 41 51 72 E-MAIL: wat@meiko.de **M** MEIKO

This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to Drawir ake changes resulting from technical progress. This drawing was computer gen s not subject to the checking and any release process; it is also not subject to change agement.

This document is only valid in conjunction with the conditions defined in Suppleme Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.

BHR

	Revision							
	Reference UPSTE STANE		RD DRA	WING / BHR				
əd					ELECTRO	J		
t	Drawing-No. S00087971				Order-No.			
	Scale	drav	vn:		checked:			
	1:25	09.	08.2020	m-iplan	09.08.2020	m-iplan		
	BHR		EN			Ссоруг	RIGHT by I	VEIKO